

# SPECIFICATIONS

## 1310 nm Superluminescent LED

### DL-CS3024A

## A. PRODUCT DESCRIPTION

The DenseLight DL-CS3024A series is a broadband SLED that operates in a true inherent superluminescent mode. This superluminescent property generates broader band at higher drive currents in contrast to other conventional SLEDs which are ASE-based, where high drive tends to give narrower band. Its low coherence reduces Rayleigh backscattering noise. Coupled with high power and large spectral width, it offsets photoreceiver noise and improves spatial resolution (in OCT) and measurand sensitivity (in sensors). The SLED is available in 14-pin BTF package. It is compliance with the requirements of Telcordia GR-468-CORE.

Enabled by DensePICTM spread spectra bandgap engineering technology, future generations of DenseLight SLEDs promise higher chip powers (up to 50mW possible), and broader spectral bands (beyond 120nm). Higher levels of integration may feature integrated SLEDs with phase modulators, optical couplers and photodetectors into a complete optical sensor chipset.

For responsive prototyping enquiries please email: [info@denselight.com](mailto:info@denselight.com)

## B. FEATURES

- Ex-fiber output power of >2mW
- 3dB bandwidth of >40nm
- Typical spectral modulation of 0.1dB
- Monitor PD
- 14-pin BTF package
- Single mode fiber

## C. APPLICATIONS

- Fiber Optic Gyroscope
- Optical Test Instrument
- Fiber Optic Sensors
- Fiber Optic Communications
- Optical Coherence Tomography
- Biomedical Imaging Device
- Clinical Healing Equipment

## D. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Condition	Min	Max	Unit
Reverse voltage	$V_R$	-	-	2	V
Forward current	$I_F$	-	-	250	mA
Forward voltage	$V_F$	$I_{op}$	-	2.5	V
Case temperature	$T_c$	$I_{op}$	-40	70	°C
SLED temperature <sup>1</sup>	$T_{SLED}$	$I_{op}$	0	70	°C
Thermoelectric cooler voltage	$V_{TEC}$	-	-	3	V
Thermoelectric cooler current	$I_{TEC}$	-	-	1.8	A
Storage temperature	$T_{stg}$	Unbiased	-40	85	°C
Storage humidity		-	5	85	%RH
Electro static discharge (ESD)	$V_{ESD}$	Human body model	-	500	V
Lead soldering temperature	$S_{temp}$	-	-	260	°C
Lead soldering time	$S_{time}$	-	-	10	sec

## E. SPECIFICATIONS ( $T_{SLED} = 25\text{ °C}$ )


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Operating current	$I_{op}$	-	-	180	200	mA
Forward voltage	$V_F$	$I_{op}$	-	-	2	V
Power in SMF	$P_o$	$I_{op}$	2	-	-	mW
Central wavelength	$\lambda$	$I_{op}$	1290	1310	1330	nm
Bandwidth	$B_{FWHM}$	$I_{op}$	40	-	-	nm
Spectrum modulation	R	$I_{op}$	-	0.1	0.3	dB
Monitor PD Current	$I_{pd}$	$I_{op}$	0.01	-	-	mA
Thermistor resistance	$R_{therm}$	$T = 25\text{ °C}$	9.5	10	10.5	k $\Omega$
Thermoelectric cooler voltage	$V_{TEC}$	$I_{op}$	-	-	1.8	V
Thermoelectric cooler current	$I_{TEC}$	$I_{op}$	-	-	0.8	A

<sup>1</sup>  $T_{SLED}$  is monitored by internal thermistor with external pin out.


## F. PACKAGE

### BTF package

Part	Description
Package type	BTF
Fiber:	SMF-28
MFD	9μm
Cladding diameter	125μm
Coating diameter	245μm
Jacket	900μm loose tube
Fiber pigtail length	1m
Fiber bending radius	>40mm
Connector	FC/APC
Dimensions	See figure

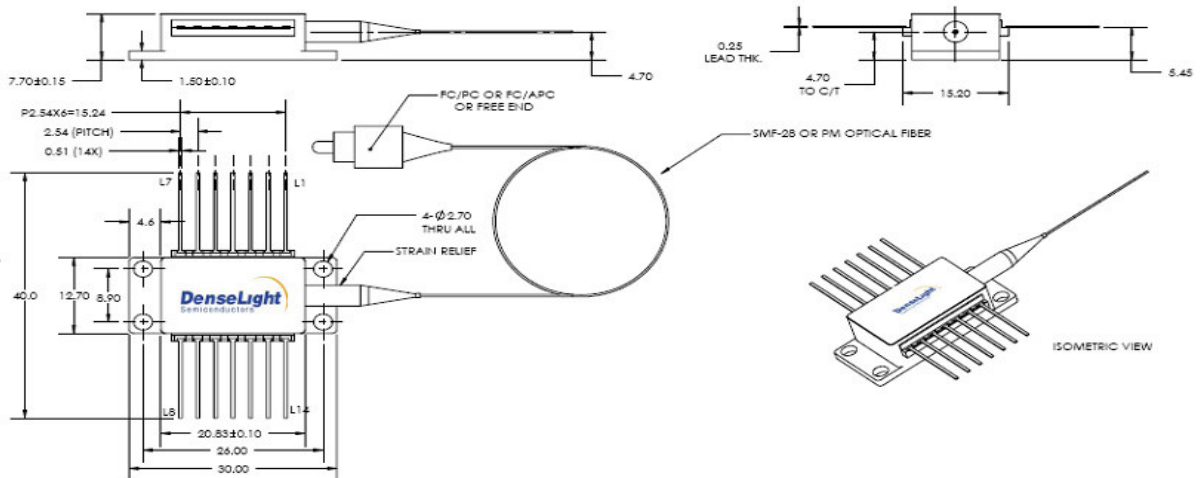


Pin Assignment	
1	TEC (+)
2	THERMISTOR
3	PD ANODE
4	PD CATHODE
5	THERMISTOR
6	--
7	--
8	--
9	--
10	SLED ANODE
11	SLED CATHODE
12	--
13	CASE
14	TEC (-)

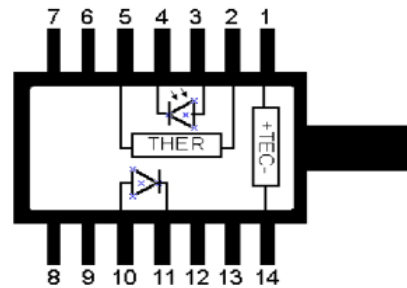


## G. TYPICAL PERFORMANCE CHARACTERISTICS


Operating condition:  $T_{SLED} = 25\text{ }^{\circ}\text{C}$

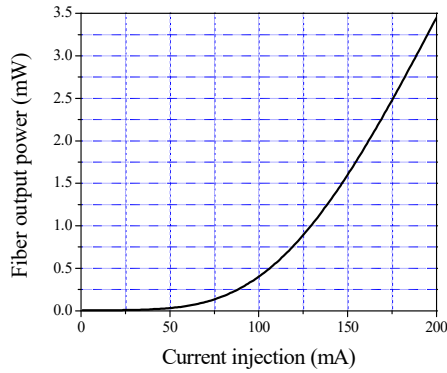


**P-I Curve**

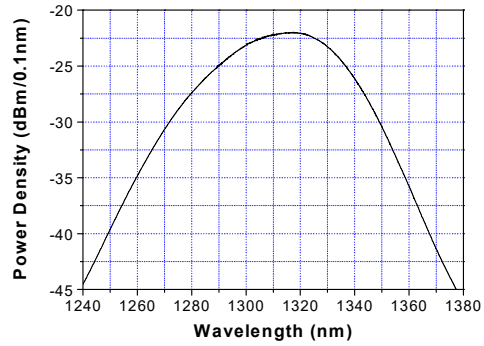

**Spontaneous Emission Spectrum**

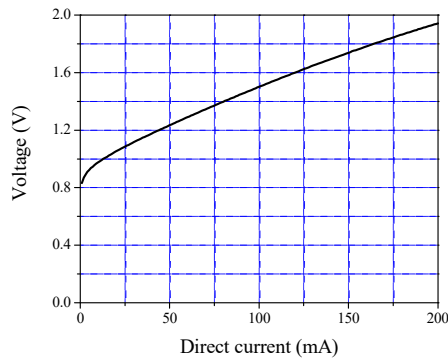

**I-V Curve**

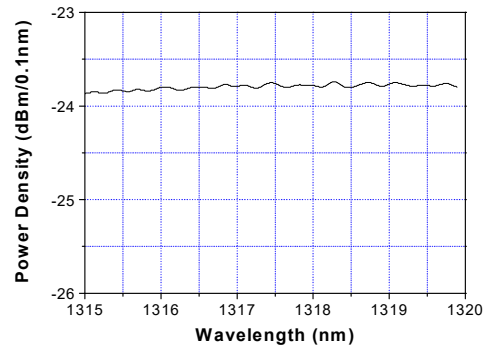

**Spectrum Modulation**