




FinishAdapt

Fiber Optic

Splice Protector Sleeves

2022 Product Range

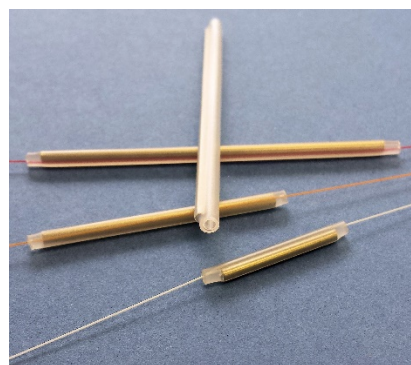

Part Number	Fiber Size	Nominal Product Dimensions mm			Strength Member mm		
		Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
SINGLE FIBER - MICRO SLEEVES							
PS-6A-X10U	250µm	1.3	10	0.35	0.5	10	Stainless Steel
PS-6A-X12U	250µm	1.3	12	0.35	0.5	12	Stainless Steel
PS-6A-X15U	250µm	1.3	15	0.35	0.5	15	Stainless Steel
PS-6A-X20U	250µm	1.3	20	0.35	0.5	20	Stainless Steel
PS-6A-X25U	250µm	1.3	25	0.35	0.5	25	Stainless Steel
PS-6A-X30U	250µm	1.3	30	0.35	0.5	30	Stainless Steel
PS-6A-X40U	250µm	1.3	40	0.35	0.5	40	Stainless Steel
PS-SP-059 (Clamshell Equiv)	250µm	1.26	30	0.35	0.5	30	Stainless Steel
SINGLE FIBER - MINI SLEEVES							
PS-6A-X25PS	250µm	1.6	25	0.35	0.8	25	Stainless Steel
PS-6A-X30PS	250µm	1.6	30	0.35	0.8	30	Stainless Steel
PS-6A-X40PS	250µm	1.6	40	0.35	0.8	40	Stainless Steel
SINGLE FIBER - MIDI SLEEVES							
PS-6A-X15M	250-900 µm	1.9	15	1.2	0.5	15	Stainless Steel
PS-6A-X20M	250-900 µm	1.9	20	1.2	0.5	20	Stainless Steel
PS-6A-X25M	250-900 µm	1.9	25	1.2	0.5	25	Stainless Steel
PS-6A-X30M	250-900 µm	1.9	30	1.2	0.5	30	Stainless Steel
PS-6A-X40M	250-900 µm	1.9	40	1.2	0.5	40	Stainless Steel
SINGLE FIBER - 5A SLEEVES							
PS-5A-X35	250-900 µm	2.1	35	1.2	0.8	31	Stainless Steel
PS-5A-X45	250-900 µm	2.1	45	1.2	0.8	40	Stainless Steel
PS-5A-X	250-900 µm	2.1	61	1.2	0.8	57	Stainless Steel
PS-5A-X45/Y (Yellow tint)	250-900 µm	2.1	45	1.2	0.8	40	Stainless Steel
SINGLE FIBER - 3A STANDARD SLEEVES - CLEAR & 10 COLOURS							
PS-3A-X22	250-900 µm	2.4	22	1.4	1.0	18	Stainless Steel
PS-3A-X25	250-900 µm	2.4	25	1.4	1.0	21	Stainless Steel
PS-3A-X30	250-900 µm	2.4	30	1.4	1.0	27	Stainless Steel
PS-3A-X35	250-900 µm	2.4	35	1.4	1.0	31	Stainless Steel
PS-3A-X40	250-900 µm	2.4	40	1.4	1.0	36	Stainless Steel
PS-3A-X45	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-X50	250-900 µm	2.4	50	1.4	1.0	46	Stainless Steel
PS-3A-X	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel

Our most popular products are shown in Red

www.finishadapt.com

sales@finishadapt.com



FinishAdapt

Fiber Optic

Splice Protector Sleeves

2022 Product Range



		Nominal Product Dimensions mm			Strength Member mm		
Part Number	Fiber Size	Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
SINGLE FIBER - US STANDARD SLEEVES							
PS-3A-X23/US	250-900 μm	2.6	23	1.4	1.4	19	Stainless Steel
PS-3A-X40/US	250-900 μm	2.6	40	1.4	1.4	36	Stainless Steel
PS-3A-X45/US	250-900 μm	2.6	45	1.4	1.4	41	Stainless Steel
PS-3A-X/US	250-900 μm	2.6	61	1.4	1.4	57	Stainless Steel
SINGLE FIBER – US LARGE SLEEVES							
PS-3A-X40/USL	250-900 μm	2.9	40	1.4	1.5	36	Stainless Steel
PS-3A-X45/USL	250-900 μm	2.9	45	1.4	1.5	40	Stainless Steel
PS-3A-X/USL	250-900 μm	2.9	61	1.4	1.5	55	Stainless Steel
SINGLE FIBER LARGE SLEEVES							
PS-1A-X40S	250-900 μm	3.0	40	1.9	1.4	36	Stainless Steel
PS-1A-X40	250-900 μm	3.2	40	1.9	1.6	36	Stainless Steel
PS-1A-X45	250-900 μm	3.2	45	1.9	1.6	41	Stainless Steel
PS-1A-X	250-900 μm	3.2	61	1.9	1.6	57	Stainless Steel
SINGLE FIBER - EXTRA LARGE SELEEVES							
PS-2A-X	250-900 μm	3.7	68	1.9	1.6	57	Stainless Steel
MASS RIBBON SLEEVES							
1-8 FIBER RIBBON SLEEVE SERIES – MULTIPLE (MASS) FIBER:							
PS-94-X30C	1-8 Ribbon	2.8-3.7	30	3.0 x 1.0	3.0 x 1.0	30	White Ceramic
PS-94-X40C	1-8 Ribbon	2.8-3.7	40	3.0 x 1.0	3.0 x 1.0	40	White Ceramic
1-12 FIBER RIBBON SLEEVE SERIES – MULTIPLE (MASS) FIBER:							
PS-99-X25C	1-12 Ribbon	3.75-4.75	25	3.5 x 1.0	3.9 x 1.85	25	White Ceramic
PS-99-X30C	1-12 Ribbon	3.75-4.75	30	3.5 x 1.0	3.9 x 1.85	30	White Ceramic
PS-99-X40C	1-12 Ribbon	3.75-4.75	40	3.5 x 1.0	3.9 x 1.85	40	White Ceramic
NEW! SMALL SIZE 12 FIBER RIBBON SLEEVE – for MULTIPLE (MASS) FIBER:							
PS-70-X25SE	1-12 Ribbon	< 2.00 mm	25	3.5 x 1.0	3.28 x 0.29	25	Double Steel Sheets
DIELECTRIC SLEEVES							
NON METALLIC PIN – SINGLE FIBER							
PS-3D-X30	250-900 μm	2.4	30	1.4	1.0	27	FRP Rod
PS-3D-X40	250-900 μm	2.4	40	1.4	1.0	36	FRP Rod
PS-3D-X45	250-900 μm	2.4	45	1.4	1.0	41	FRP Rod
PS-3D-X	250-900 μm	2.4	61	1.4	1.0	57	FRP Rod




FinishAdapt

Fiber Optic

Splice Protector Sleeves

2022 Product Range

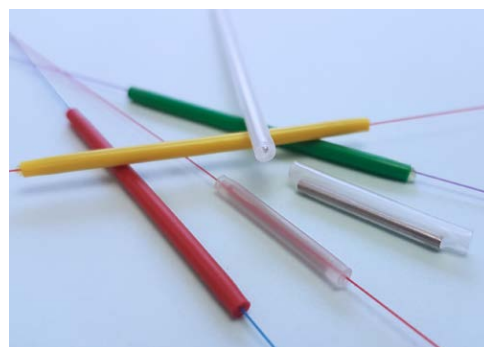

FLEXIBLE / PINLESS SLEEVES

FLEXIBLE 6A MICRO / MINI SLEEVE SERIES – SINGLE FIBER

PS-6A-X15UNP	250µm	1.1	15	0.35	No Strength Member
PS-6A-X25UNP	250µm	1.1	25	0.35	No Strength Member
PS-6A-X25NP	250µm	1.45	25	0.35	No Strength Member
PS-6A-X40NP	250µm	1.45	40	0.35	No Strength Member
PS-SP-154	250-400µm	1.45	30	0.60	No Strength Member

FLEXIBLE 3A STANDARD SLEEVE SERIES – SINGLE FIBER

PS-3A-X18NP	250-900 µm	2.1	18	1.4	No Strength Member
PS-3A-X20NP	250-900 µm	2.1	20	1.4	No Strength Member
PS-3A-X25NP	250-900 µm	2.1	25	1.4	No Strength Member
PS-3A-X40NP	250-900 µm	2.1	40	1.4	No Strength Member
PS-3A-X45NP	250-900 µm	2.1	45	1.4	No Strength Member
PS-3A-XNP	250-900 µm	2.1	61	1.4	No Strength Member
PS-3A-X90NP	250-900 µm	2.1	90	1.4	No Strength Member

COLOURED - SINGLE FIBER - 3A STANDARD SLEEVES

			Nominal Product Dimensions mm			Strength Member mm		
Part Number	Colour	Fiber Size	Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
COLOURED SPLICE SLEEVES – 3A Series 61mm Long								
PS-3A-0	Black	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-1	Brown	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-2	Red	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-3	Orange	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-4	Yellow	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-5	Green	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-6	Blue	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-7	Violet	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-8	Grey	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-9	White	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
COLOURED SPLICE SLEEVES – 3A Series 45mm Long								
PS-3A-0/45	Black	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-1/45	Brown	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-2/45	Red	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-3/45	Orange	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-4/45	Yellow	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-5/45	Green	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-6/45	Blue	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-7/45	Violet	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-8/45	Grey	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-9/45	White	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel



FinishAdapt

Fiber Optic

Splice Protector Sleeves

2022 Product Range



NEW! ANT CRIMP SLEEVES

PCS-A30 (150)

Mechanical crimp protection sleeve. For 250um fiber. Aluminium body / adhesive inner. 30mm long. Supplied in a box of 150 pieces.

PCS-A30-TOOL

Crimp tool – for fast and easy installation.

CUSTOM MANUFACTURED PRODUCTS

CUSTOM PRODUCTS

At our UK based R&D facility we can design, develop and prototype special sizes and types of splice protector sleeves for customers' special applications.

CUSTOM COLOURS

We can manufacture splice sleeves that are colour matched to samples or to specified RAL numbers.

CUSTOM LABELS/KITS

We confidentially produce customised kits and 'own label' packaging for many leading OEMs and distributors.



www.finishadapt.com



sales@finishadapt.com

Quality, Reliability and Trust

FinishAdapt are the leading Manufacturers of premium quality fibre optic fusion Splice Protector Sleeves. Our primary focus is on high levels of product quality, speed of installation and the long-term reliability essential for FTTx installations and photonics applications.

25+ years of Manufacturing expertise

For over **25+ years** Finishadapt have specialised solely in the design and manufacture of fusion splice sleeves. We originally developed the product with Bellcore / British Telecom and are joint authors of the CENELEC splice sleeve European standard. Providing our customers with extensive product knowledge and technical support.

Trusted, Certified and Approved

We are proud to hold **Telcordia / Bellcore GR-1380-CORE Certification**, while most suppliers can only claim compliance to this industry standard. This ensures Finishadapt product meets strict design specifications and are fully tested and certified. Bellcore Test Conformance Report TCR-08 applies.

Our products are manufactured using UL approved materials to UL224. UL Certification YDPU2.E467437 applies. All products are fully RoHS and REACH compliant and Conflict-Free. Providing our customers with the reassurance that Finishadapt products are the highest quality with proven long-term reliability and environmental compliance.

Unique Design for Fast Installation

Finishadapt products incorporate our **superior 'Pre-shrunk' splice sleeve design**. This ensures all components are securely held together with a single fiber aperture. This provides for easier fiber insertion and faster installation times.

Largest Product Range & Customised Solutions

We offer the most comprehensive range on the market with **70+ different Splice Sleeve products**. With a wide range of diameters, lengths, types and colours, including Micro, Mini, Midi Standard, US, Dielectric, Flexible and Ribbon Sleeves. This provides our customers with the greatest choice and products available for all applications.

We actively work with many leading OEMs and distributors globally in designing, prototyping and manufacturing **Custom Designs**. Providing our customers with product solutions for market specific and specialist applications.

With our proven reputation for product quality and reliability, we provide **Own brand label and packaging solutions** to many leading manufacturers and distributors globally.

Huge Stocks and fast global delivery

We hold over **7 Million splice sleeves in stock**. This enables us to provide the widest product choice, instant availability and fast global deliveries. With our strong reputation for providing outstanding customer service.