


MPO/MTP Patchcord

Specifications:

Parameter	Value	
Connector Type	MPO	
Fiber Type	SM 9/125 G652D	50/125 (OM3, OM4)
Insertion loss (dB)	MPO/MTP	≤0.7 (Standard) ; ≤0.5 (Low Loss) LC,FC IL<0.3dB
Return loss (dB)	≥40 (UPC) , ≥60 (APC) ≥20 (MM)	
Durability	≤0.2 (dB)	
Operating temperature (°C)	-40 ~ + 85	
Cable type	Round, Oval,	
Length	1m, 2m, 3m, 10m, customize	

Housing color—Blue(SM/UPC),Green(SM/APC),Beige(MM),Aqua



Polarity :

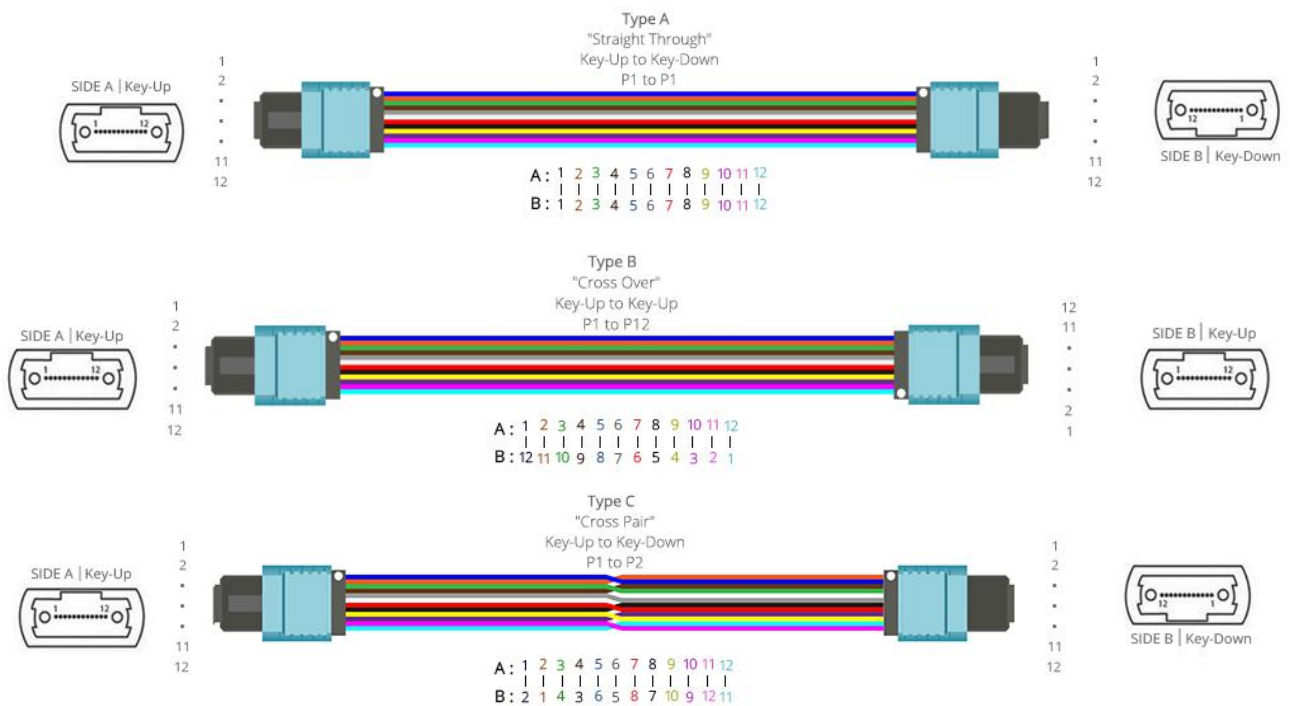

Package



Drawing

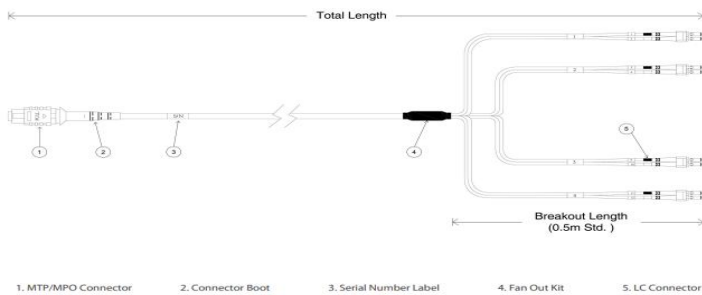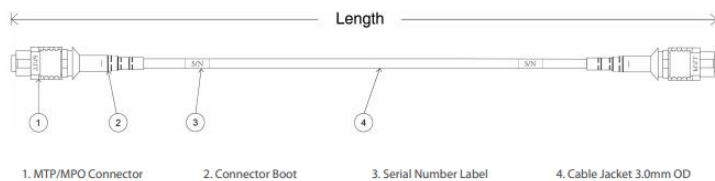

Ordering Information

MP O/M TP	Connecto (End1)	Connector (End2)	Tested Wavel ength	Method	Cable Pigtail Type	Fiber Type	Leng th	Ferrul e
	8= 8 Line 12=12 line 24=24 Line	8= 8 Line 12=12 Line 24= 24 Line LC=LC/UPC LA=LC/APC SC=SC/UPC FC=FC/UPC	1550 850	S=Stright Through C=Cross over P=Cross Pair	R=Ro und O=Ov al	1=G652D SMF-28e 3=50/125 OM3 4=50/125 OM4	1=1 m X=S pecif y	S=Sta ndard L=Low Loss