

# 1650nm Semiconductor Optical Amplifier



## Description:

The PL-SOA-1-A81-W1650-PAPA 1650nm Semiconductor Optical Amplifier (SOA) is single-pass, traveling-wave amplifier that perform well with both monochromatic and multi-wavelength signals. The SOA consists of a highly efficient InP/InGaAsP Multiple Quantum Well (MQW) layer structure.

## Features:

- Single mode input/output
- Low chip-to-fiber coupling loss
- CW or pulsed operation
- SM or PM Fiber ( $\phi 0.9\text{mm}$ )
- FC-APC connectors
- 14-pin butterfly package
- Built-in thermistor and TEC
- Low power consumption

## Optional:


- Fiber transmission systems
- Fiber optic gyros
- Fiber optic sensors
- Optical coherence tomography
- Testing Light source

## Laser Specifications:


Electrical/Optical Characteristics(T<sub>sub</sub>=25°C, CW bias unless stated otherwise)

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Saturation output power	P <sub>sat</sub>	Pin=-3dBm, I= 350mA,T=25°C	13	13.4		dBm
Small Signal Gain	G <sub>max</sub>	Pin=-25dBm, I= 500mA,T=25°C	20	20.5		dB
Noise Figure	NF	Pin=-25dBm, I= 500mA,T=25°C		4.6	10	dB
Polarization extinction ratio	PER	I= 500mA,T=25°C	20	27		dB
Voltage	V <sub>op</sub>	I=500mA,T=25°C		1.845	3	V

## Spectrum:

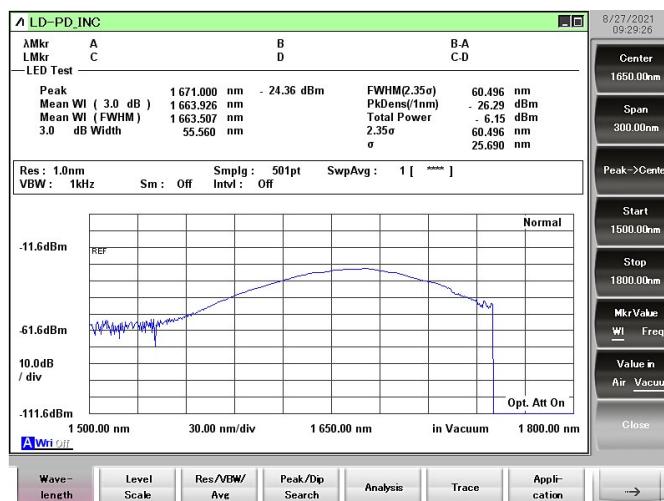


## SOA Power amplification comparison(Pin = 0dBm, I = 500 mA):

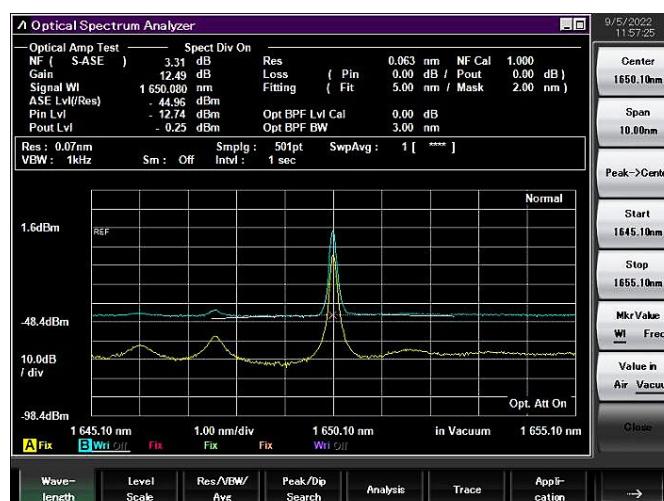


Headquarters:288,Woolands Loop, #04-00,Singapore 738100

## Gain and NF Trend:

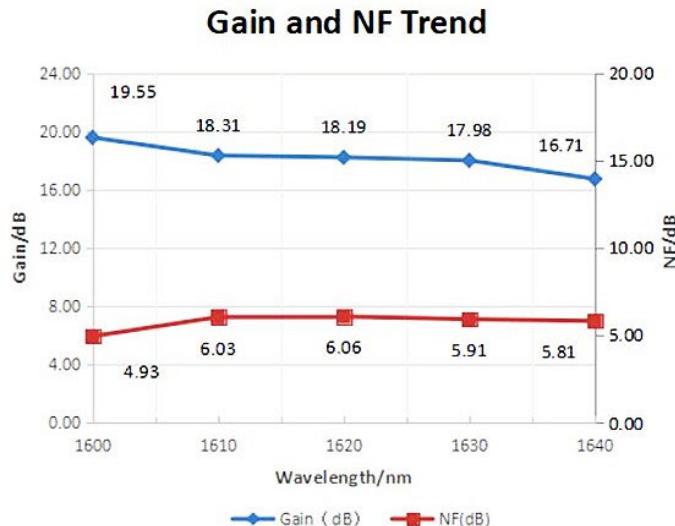


## Package Size and pin definition:

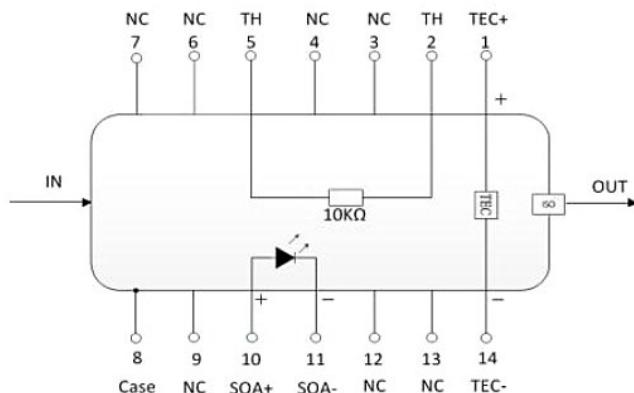

NO.	Function	NO.	Function
1	Thermoelectric Cooler (+)	8	Case Ground
2	Thermistor	9	N/C
3	N/C	10	SOA Anode (+)
4	N/C	11	SOA Cathode (-)
5	Thermistor	12	N/C
6	N/C	13	N/C
7	N/C	14	Thermoelectric Cooler (-)

## Outline Drawings (unit: mm):

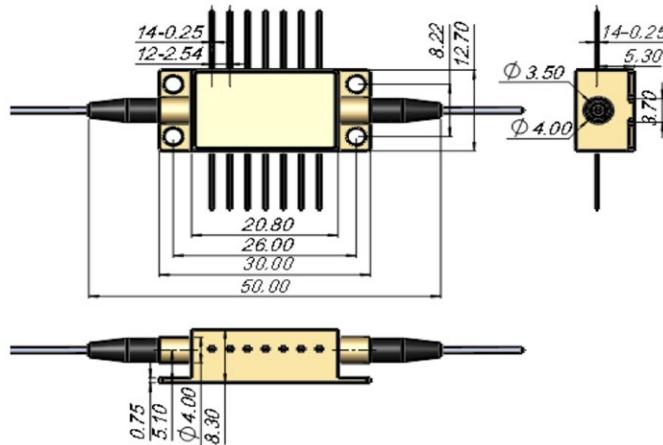

## Ordering Info:

PL-SOA-☆-A8△-W□□□□-XX

☆ : Output Power

A: 13dbm

B: 20dbm

△: Bandwidth

1: 60-70nm

2: 30-40nm

□□□□: Wavelength

680: 680nm

850: 850nm

\*\*\*\*\*

1550: 1550nm

1650: 1650nm

XX: Fiber and Connector Type

SASA=(SMF-28E+ FC/APC)+(SMF-28E+ FC/APC)

SPSP=(SMF-28E+ FC/PC)+(SMF-28E+ FC/PC)

PAPA=(PM Fiber+ FC/APC)+(PM Fiber+ FC/APC)

PPPP=(PM Fiber+ FC/PC)+(PM Fiber+ FC/PC)

PAPA=(PM Fiber+ FC/APC)+(PM Fiber+ FC/APC)