




10/100/1000M, Single Fiber, SC, External Power Supply Fiber Media Converter

Key Features

- ✚ Wavelength Division Multiplexing (WDM), Tx and Rx on 1 fiber
- ✚ 1000BASE-FX FIBER to 10/100/1000BASE-T COPPER Ethernet conversion
- ✚ 1600byte super data packet transmission
- ✚ Full duplex-flow control, Half duplex-back pressure
- ✚ Link fault pass through (LFPT)

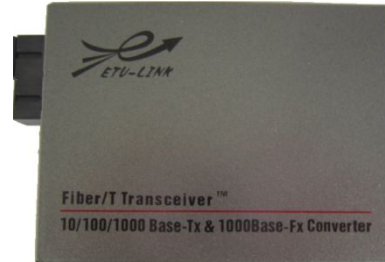


Introduction

The OM510-GE series, the Gigabit Ethernet media converters, featuring 1-fiber transmission with Wavelength Division Multiplexing (WDM) technology, utilize fiber optics to extend the physical distance range of typical Ethernet link to 20km-100km. It's often applied in school, cyber bars, offices, and telecommunication networks.

Specification

Standard	IEEE802.3 (10BASE-T), IEEE802.3u 100BASE-TX/FX (Fast-Ethernet), IEEE802.3z 1000BASE-SX/LX(Gigabit-Ethernet), IEEE802.3x (Flow Control), IEEE802.1q, IEEE802.1p QoS, IEEE802.1d Spanning Tree
10/100/1000BASE-T	STP or UTP Category 5/5e/6 cable (Max. 100m)
1000BASE-FX	9/125um single mode fiber cable (20/40/60/80/100/120km)
Conversion Mode / Delay Time	Store-and-Forward < 10us, straight-through<0.9us
Flow control	Full duplex-flow control, Half duplex-back pressure
RJ-45 Port	Auto-MDI/MDIX
Fiber Connector	SC standard, ST/FC optional
Wavelength	1310/1550nm
Dimensions	70mm(W) x 93mm(D) x 25mm(H)
Weight	Net weight : 0.16kg; Gross weight : 0.42kg
Input Voltage	DC 5V1A with External power adapter
Power Consumption	<2.5W
MTBF	50,000 hours
BER	<1/1000000000
MAC Address Table	1K
Buffer Size	1M
Operating Temperature	0°C~50°C
Storage Temperature	-40°C~70°C
Storage Humidity	5%~90% non-condensing

Fiber Media Converter EM-1100-BS20

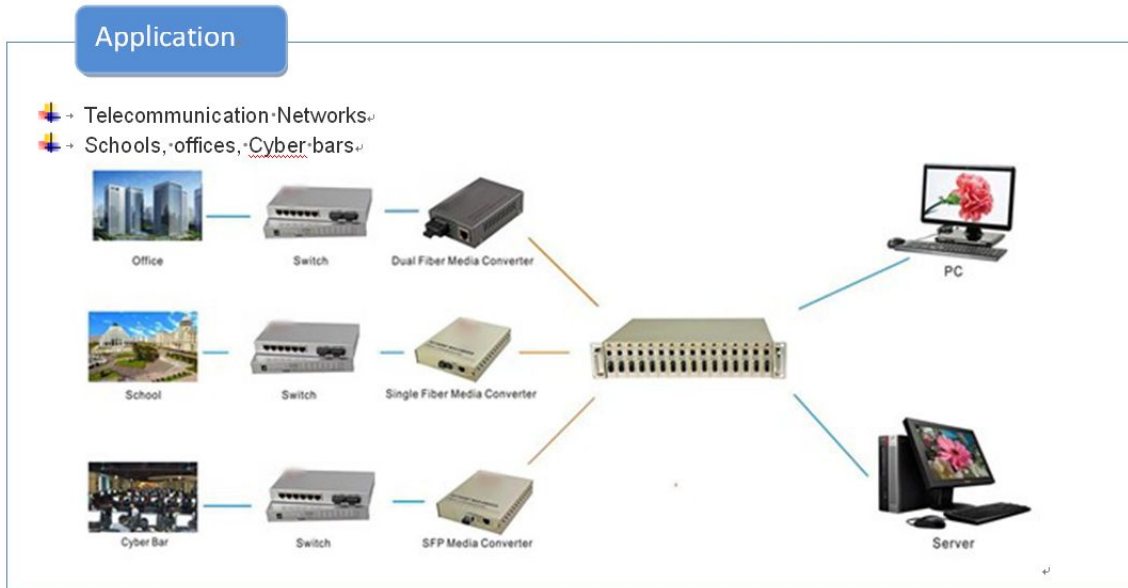

Ordering Details

EM-1100-BS20 A	10/100/1000M, Standalone, single fiber, single mode, TX1310/RX1550nm,SC, 20km
EM-1100-BS20 B	10/100/1000M, Standalone, single fiber, single mode, TX1550/RX1310nm,SC, 20km
EM-1100-BS40 A	10/100/1000M, Standalone, single fiber, single mode, TX1490/RX1550nm,SC, 40km
EM-1100-BS40 B	10/100/1000M, Standalone, single fiber, single mode, TX1550/RX1490nm,SC, 40km
EM-1100-BS60 A	10/100/1000M, Standalone, single fiber, single mode, TX1490/RX1550nm,SC, 60km
EM-1100-BS60 B	10/100/1000M, Standalone, single fiber, single mode, TX1550/RX1490nm,SC, 60km

*Above listed are most frequently ordered items. Please contact us for other configurations.

Item Number Code Explain:

XX- XXXX-XX XX

